


DATASHEET

00145066

CCT BUSBAR BOX 250A W760

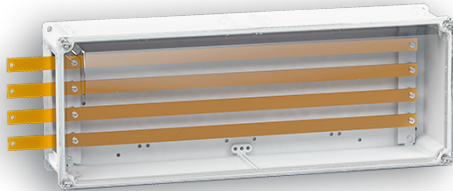

Dimensions	760x285x185
WxHxD (mm)	
Locking System	Triangular plastic screw
Color	Grey - RAL 7035
Tariff Code	85371099

Observations	This product is supplied exclusively as an integral part of an equipped and tested set, ensuring compliance with applicable standards.
---------------------	--

Materials

Enclosure	Press polyester box (Fiberglass reinforced)
------------------	---

Protection and Security

Insulation Class	Class II Insulation
IP Protection Degree	43
IK Protection Degree	09
GWT	960°C
Static Load	200kg/m3
Installation Temperature	Mín: -5°C Máx: 40°C

Electrical Features

In	250A
Ue	230V/400V~
Ui	500V
degree of pollution	3
Minimum bus section	Barra 25x5
Frequency	50Hz
Icc (kA)	10kA

Standardizing Documentation

Standards	EN IEC 61439-2
Directive	2014/35/EU
	DIT-C14-140/N
Regulations	RTIEBT

Nota:The image may not correspond to the product code shown. Please refer to the technical specifications.